



输出功率: 约1.0~12.0W

碳刷马达

典型应用: 电子门锁

后视镜

家用电器

OUTPUT:APPROX 1.0~12.0W

Carbon-brush Motors


Typical Applications: Electronic Door Lock

Rearview Mirror

Household Appliances

1.OUTLINE DRAWING:

UNIT:MM

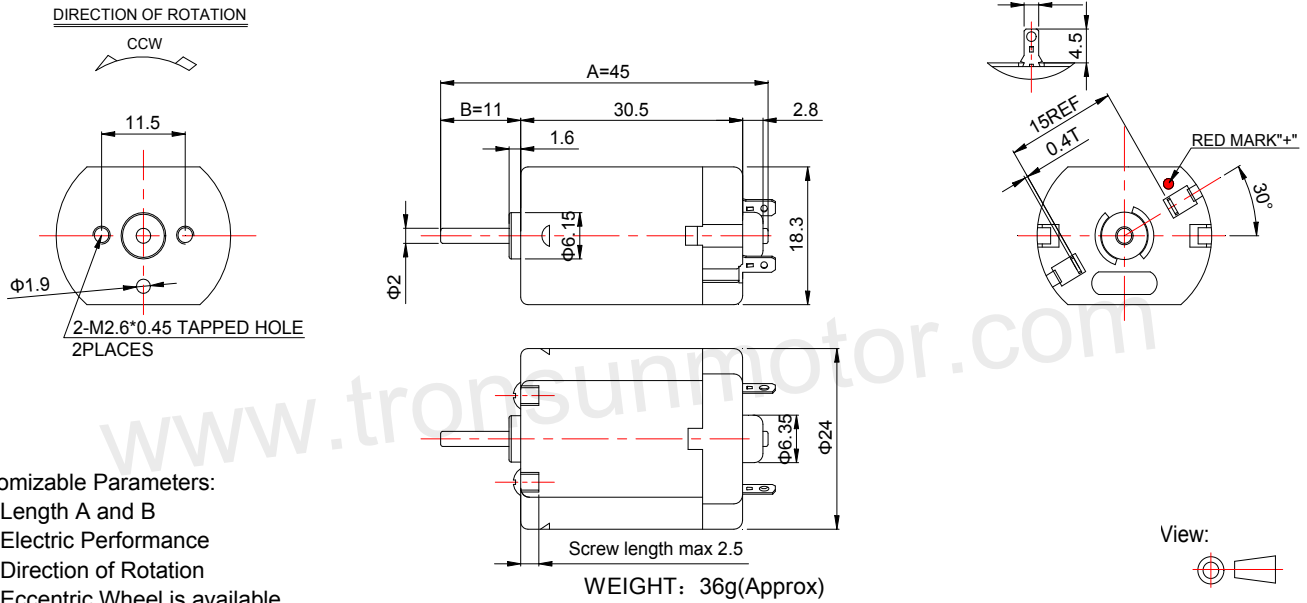

Customizable Parameters:

1. Length A and B
2. Electric Performance
3. Direction of Rotation
4. Eccentric Wheel is available

2.MOTOR PERFORMANCE :

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL V	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	OUTPUT W	TORQUE g.cm	CURRENT A		
FK-280SA-11390	6.0~25.0	24.0	9500	0.04	7979	0.21	38	3.73	3.11	240	23.55	1.10
FK-280SA-13240	6.0~13.0	12.0	7300	0.05	5992	0.23	27	2.65	1.66	152	14.92	1.05
FK-280SA-18165	6.0~13.0	12.0	12300	0.08	10710	0.5	35	3.43	3.84	270	26.50	3.50

